ÜBERSICHTSZEICHNUNG ASSEMBLY DRAWING





PULSIUM 5.0 / 6.0 / 6.0 AXS RIVAL / 7.0 / 8.0 (MY25)




HOW TO USE EXPLODED VIEW

E	BOM-ID	Description	Specification	Torque	QTY	Service Kit nr.
	1	Counter sunk screw (Set)	IS2 - M3 x 8 mm	1 Nm	2	KHB00025 💿 🎎
-						


You can <u>click</u> on the logo according to your part's supplier.
It will take you to the purchase page.



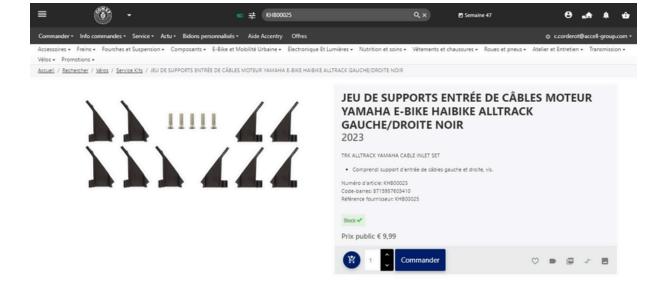

LAPIERRE

ASSEMBLY DRAWING headtube / fork

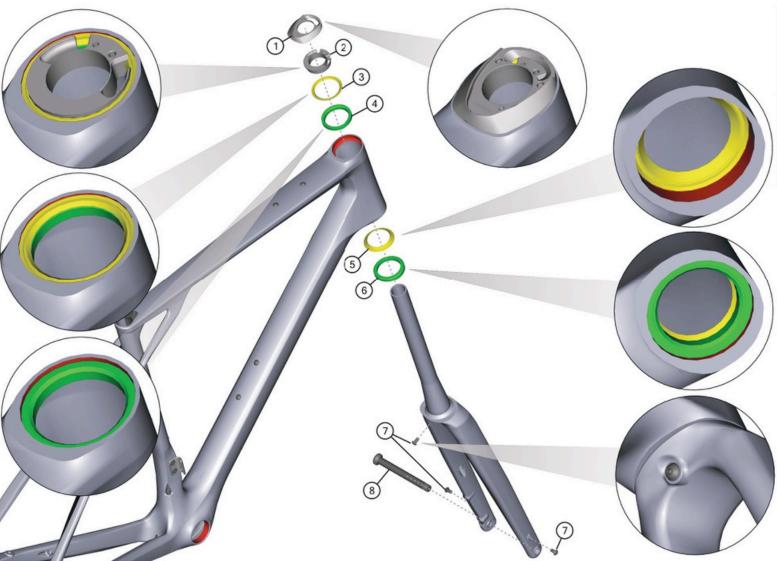

Hinweis: Bei den Schrauben muss mittelfeste Gewindesicherung verwendet werden. Rote Flächen müssen gefettet werden.

Note: use me

use medium strength screw lock for screw

threads.

Red surfaces have to be greased.

PULSIUM (MY25) date: 27-02-2024 version: 01

ASSEMBLY DRAWING

headtube / fork



BOM-ID	Item nr.	QTY	Description	Specification	Torque	Service kit nr.	
1	10010761	1x	Headtube top cover	1		KLP00088	ike parts
2	10061948	1x	Compression ring			KLP00088	ike parts
3	10061961	1x	Upper headset sealing			KLP00088	ike parts
4	10072150	1x	Upper headset bearing			KLP00088	ike parts
5	10032018	1x	Lower headset sealing) p=1		KLP00088	ike parts
6	10061947	1x	Lower headset bearing			KLP00088	ike parts
7	10012936	3x	Lens head screw	HS3 - M5 x 10 mm	2 Nm	-	
8	10031439	1x	Front thru-axle	TA12 x 114 mm / M12 x P1.5 x 12 mm	10 Nm	KLP00090	ike parts



PULSIUM (MY25) date: 27-02-2024

ÜBERSICHTSZEICHNUNG ASSEMBLY DRAWING STEM & HANDELBAR



Description	Specification	Service kit nr.
LAPIERRE STEM ALLOY	31.8 Ø 120mm	KLP00132
LAPIERRE STEM ALLOY	31.8 Ø 110mm	KLP00131 🍪 bike
LAPIERRE STEM ALLOY	31.8 Ø 100mm	KLP00130 🚳 kike
LAPIERRE STEM ALLOY	31.8 Ø 90mm	KLP00129 👸 kike
LAPIERRE STEM ALLOY	31.8 Ø 80mm	KLP00140 🍪 þike


Description	Specification	Service kit nr.	
LAPIERRE CARBON AERO HANDELBAR 38cm	31.8 Ø 38cm	KLP00120	ike parts
LAPIERRE CARBON AERO HANDELBAR 40cm	31.8 Ø 40cm	KLP00121	ike Parts as cryst.
LAPIERRE CARBON AERO HANDELBAR 42cm	31.8 Ø 42cm	KLP00122	bike parts



PULSIUM (MY25) date: 27-02-2024

ASSEMBLY DRAWING main frame



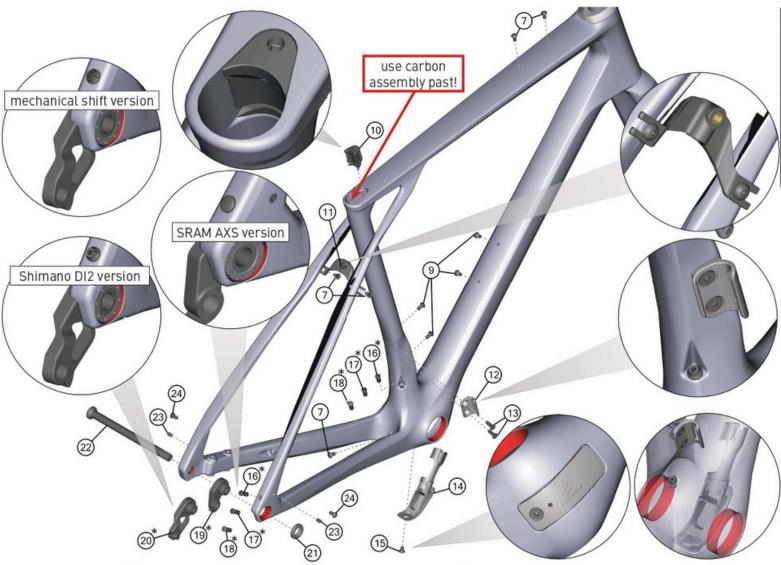

Hinweis: Bei den Schrauben muss mittelfeste Gewindesicherung verwendet werden. Rote Flächen müssen gefettet werden.

Note: use medium strength screw lock for screw

threads.

Red surfaces have to be greased.

* model-specific



Pos. 23: Headless screw pre-installed by the frame manufacturer (close the thread)!

Optional: Pos. 24 Lens head screw (accessories box)

PULSIUM (MY25) date: 27-02-2024



main frame



BOM-ID	Item nr.	QTY	Description	Specification	Torque	Service kit nr.	
7	10012936	5x	Lens head screw	HS3 - M5 x 10 mm	2 Nm	-	ike pike
9	10012933	4x	Bottle hanger bolts			-	ike pike
10	10012935	1x	Seat post wedge		8 - 10 Nm	KLP00103	ike parts
11	10031886	1x	Fender bridge			KLP00102	ike pike
12	10099810	1x	FD hanger			KLP00092	ike arts
13	10012931	2x	Countersunk head screw	HS3 - M5 x 20 mm	5,1 Nm	KLP00092	ike parts
14	10099814	1x	Battery holder			KLP00093	ike parts
15	10012413	1x	Countersunk head screw	HS3 - M5 x 12 mm	2 Nm	KLP00093	ike parts
16*	10017890	2x	Cable guide (for Shimano Di2 version) (Pulsium 6.0 / 7.0 / 8.0)			KLP00094	ike parts
17*	10017889	2x	Cable guide (for mechanical version) (Pulsium 5.0)			KLP00094	ike pike
18*	10017891	2x	Cable guide (for Sram AXS version) (Pulsium 6.0 AXS RIVAL)			KLP00094	ike bike
19*	10099811	1x	RD hanger post mount (for Sram AXS version) (Pulsium 6.0 AXS RIVAL)			KLP00095	ike parts
20*	10062429	1x	RD hanger direct mount (for Shimano version) (Pulsium 5.0 / 6.0 / 7.0 / 8.0)			KLP00096	ike parts
21	10099813	1x	RD hanger nut		10 Nm	INCLUDED IN KLP0009	5 & KLP00096
22	10031442	1x	Rear thru-axle	TA12 x 161 mm / M12 x P1.5 x 18 mm	10 Nm	KLP00097	ike parts
23		2x	Headless screw (pre-installed)	M5 x 8 mm			
24	(optional) 10012936	2x	Lens head screw (accessories box)	HS3 - M5 x 10 mm	2 Nm	-	


^{*} model-specific



Description	Specification	Service kit nr.	
XELIUS DRS SEAT POST	400mm 0mm OFFSET	KLP00136	ike parts
XELIUS DRS SEAT POST	350mm 0mm OFFSET	KLP00137	ike pike
XELIUS DRS SEAT POST	350mm 15mm OFFSET	KLP00138	bike parts
XELIUS DRS SEAT POST	400mm 15mm OFFSET	KLP00139	bike parts

PULSIUM (MY25) date: 27-02-2024

ÜBERSICHTSZEICHNUNG ASSEMBLY DRAWING

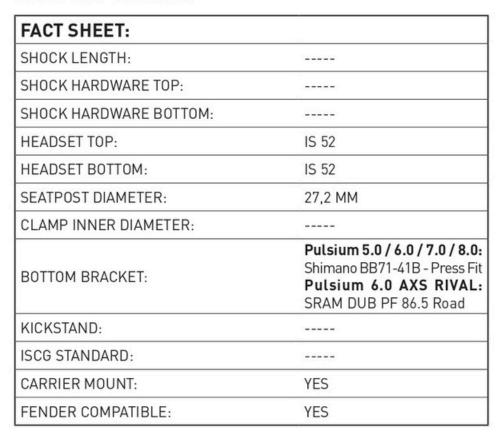



DROPPER SEATPOST READY:	YES
WATTERBOTTLE MOUNT:	1x Downtube / 1x Seattube
MAXIMUM PERMISSIBLE TOTAL WEIGHT:	110 KG (Cat. 2)
MAXIMUM TIRE SIZE:	38c
WHEEL SIZE:	28" (700x32c)
QUICK RELEASE LENGTH:	TA12x161 mm / M12xP1.5xL18 mm
OVER-LOCKNUT DIMENSION (O.L.D.):	142 MM
FD CLAMP SIZE:	
FD TYPE:	
ENGINE:	
BATTERY:	
DISPLAY:	



PULSIUM (MY25) date: 27-02-2024