

ÜBERSICHTSZEICHNUNG

Assembly Drawing

GHOST




PATH ASKET PRO (MY24)
PATH ASKET ADVANCED (MY24)

Spare Part Kits:

➤ <u>Protector Kit</u>	KE0377	Page 04
➤ <u>Cable Guide Kit</u>	KE0378	Page 05
➤ <u>Charge Port Kit</u>	KE0379	Page 06

ÜBERSICHTSZEICHNUNG

Assembly Drawing

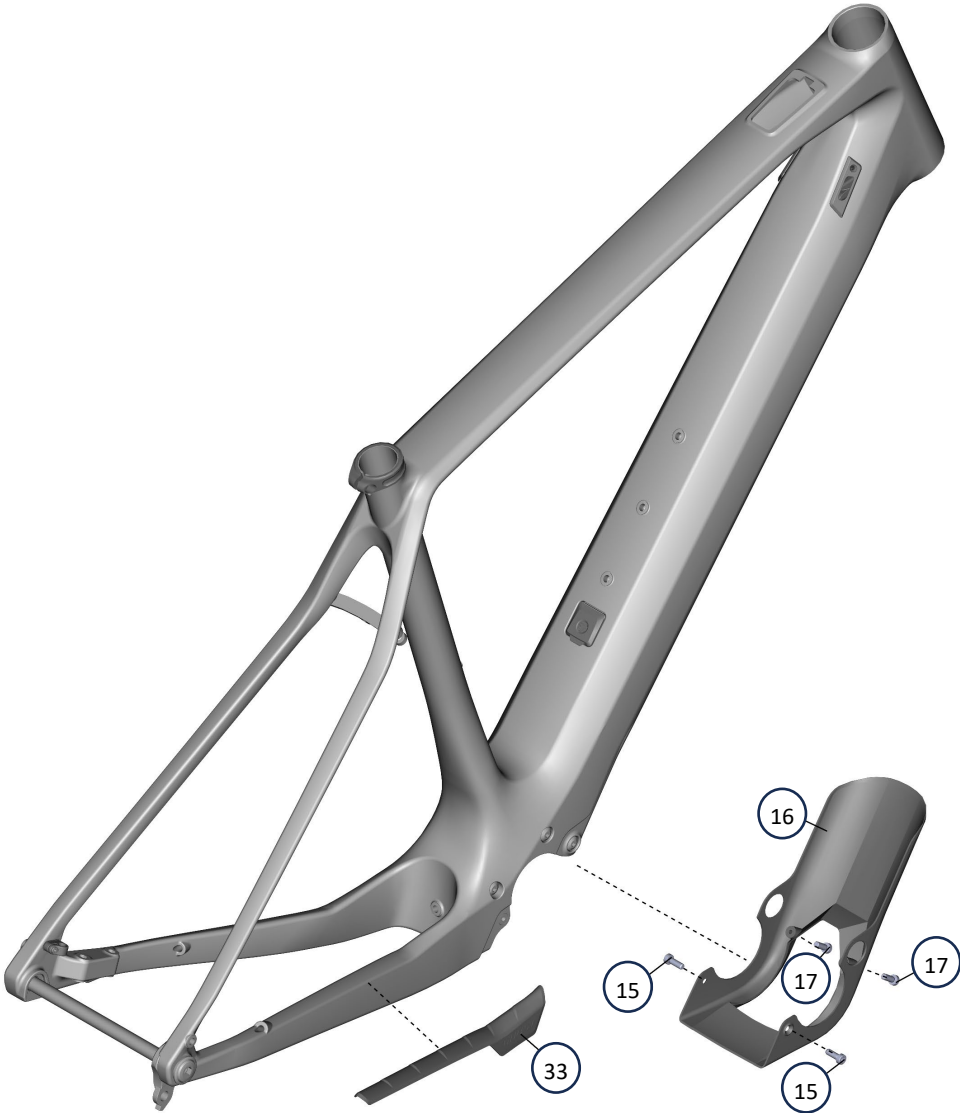


KE0377 - PROTECTOR KIT - PATH ASKET

BOM-ID	Description	Specifiction	Torque	QTY
15	counter sunk screws for cover	HEX3 – M4x10mm	1 Nm	2
16	cover drive unit			1
17	hexagon screws for cover	HEX3 – M4x10mm	1 Nm	2
33	cs protector			1

ÜBERSICHTSZEICHNUNG

Assembly Drawing

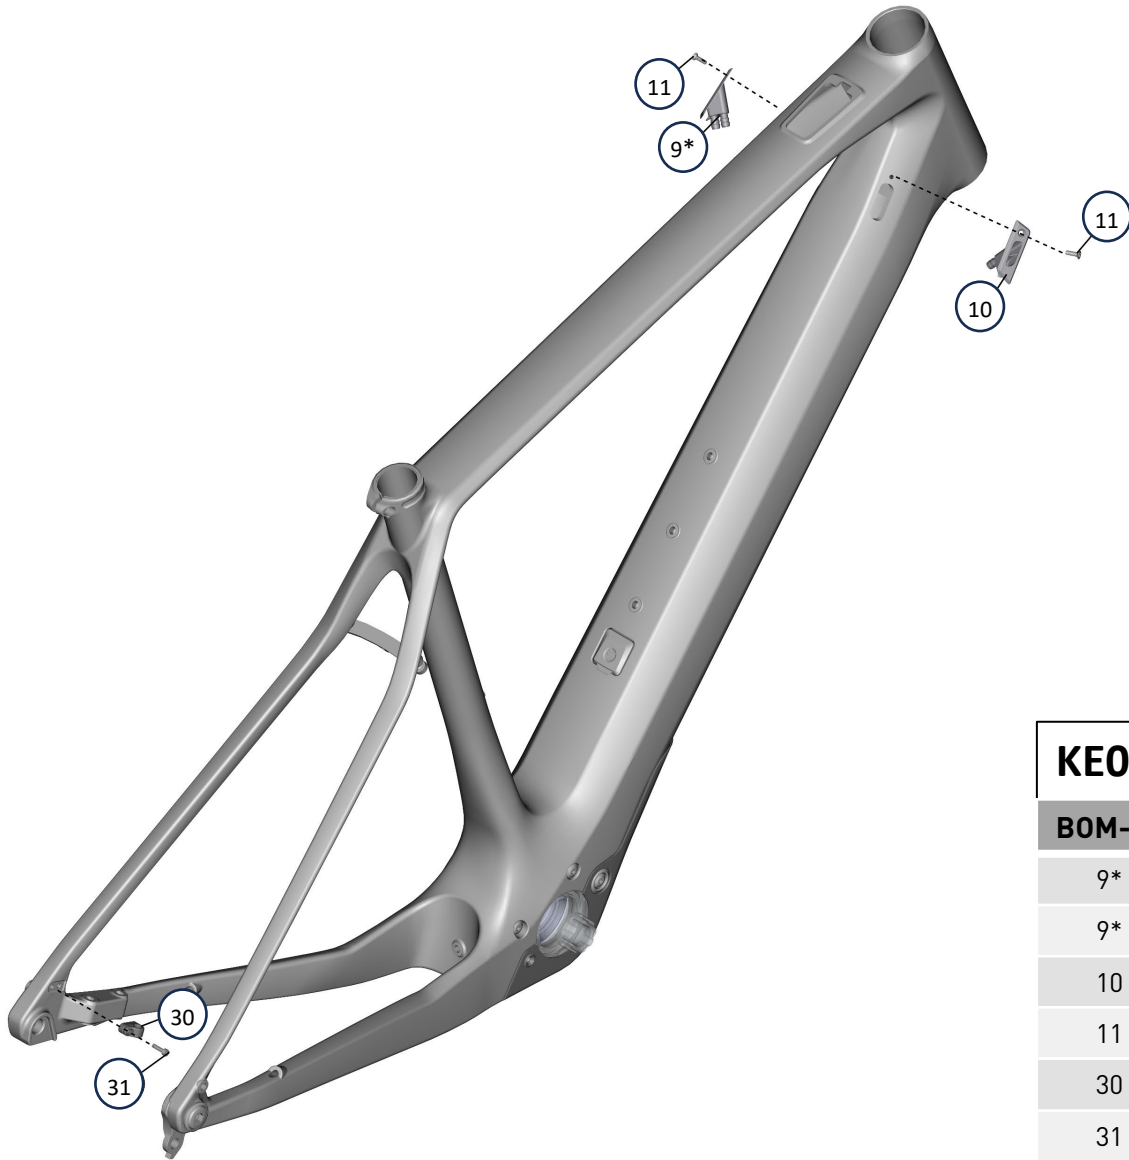


KE0378 - CABLE GUIDE KIT - PATH ASKET

BOM-ID	Description	Specifiction	Torque	QTY
9*	PATH ASKET <u>ADVANCED</u> cable guides left			1
9*	PATH ASKET <u>PRO</u> Cable guides left			1
10	PATH ASKET cable guide right			1
11	Countersunk screw	T10 - M3x10mm	0,8 Nm	2
30	holder speedsensor			1
31	cylindrical head screw	HEX 2,5 – M3x12mm	0,5 Nm	1

ÜBERSICHTSZEICHNUNG

Assembly Drawing

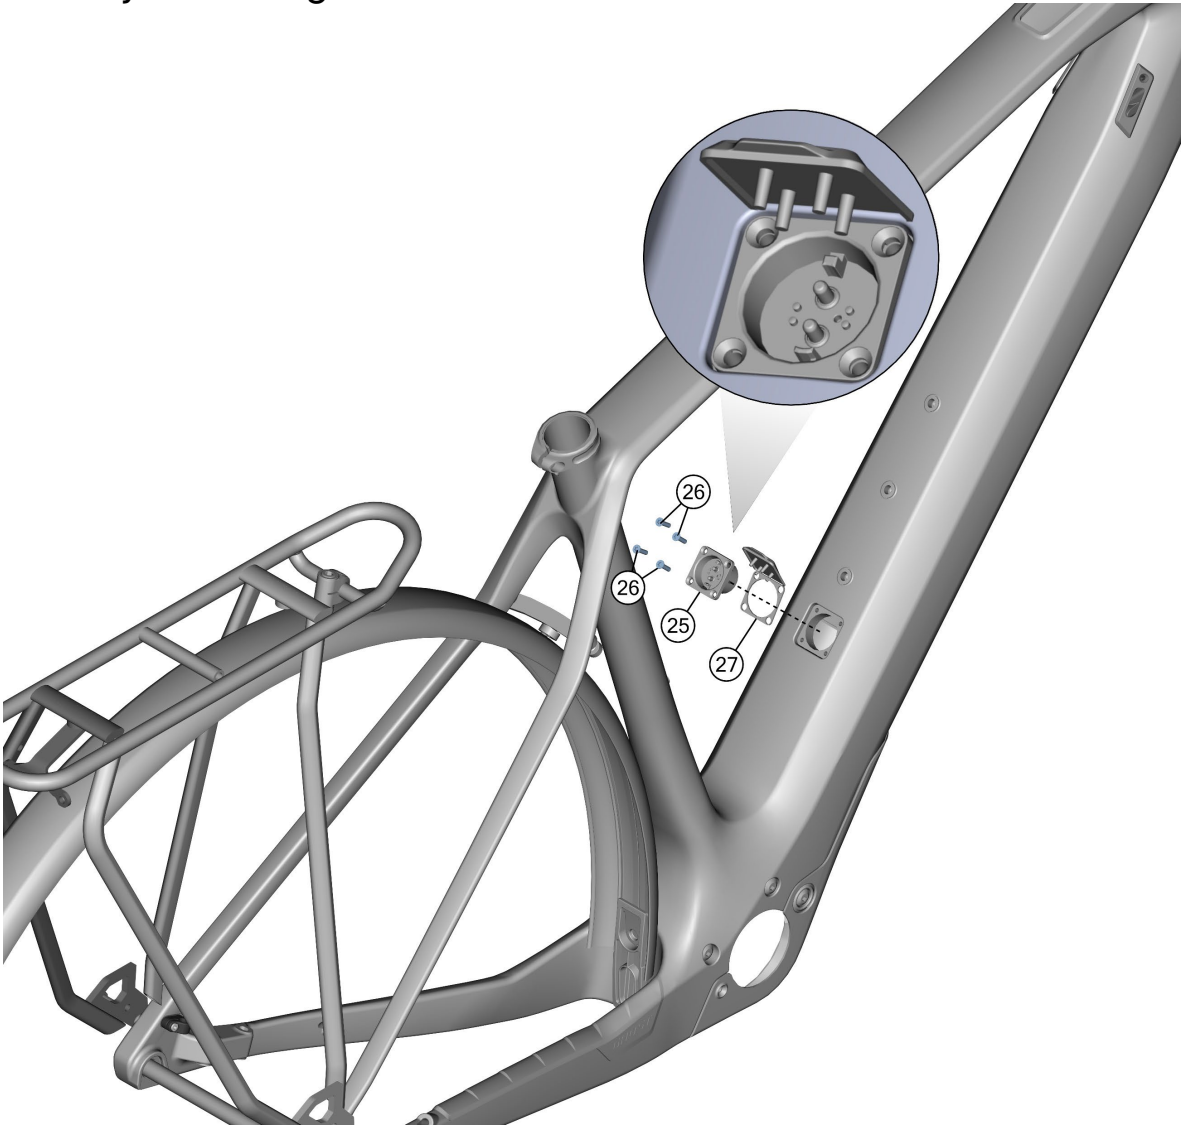


KE0379 - CHARGE PORT KIT - PATH ASKET

BOM-ID	Description	Specifiction	Torque	QTY
25	Charge Port			1
26	Screws For Charge Port	T8 – M2,5x10mm	0.5 Nm	4
27	Cap Charge Port			1

ÜBERSICHTSZEICHNUNG

Assembly Drawing

GHOST

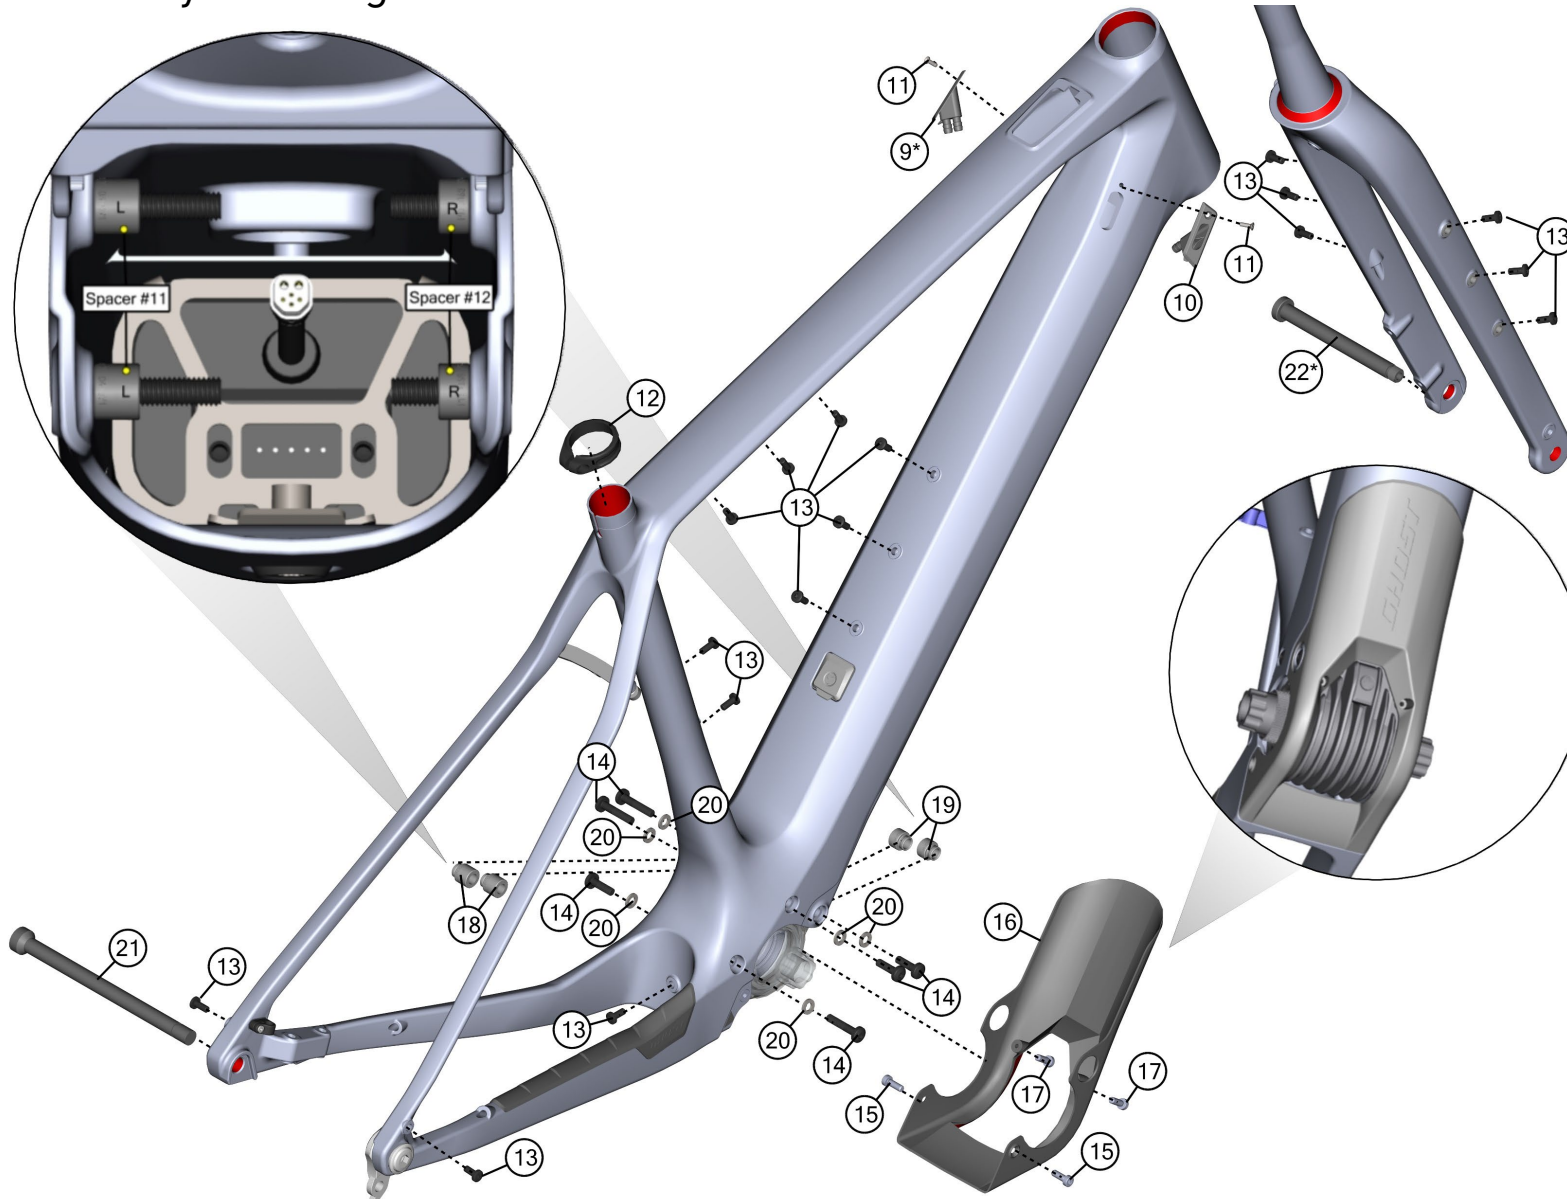

Hinweis:

Bei Schrauben muss mittelfeste

Gewindesicherung verwendet werden.

Rote Flächen müssen gefettet werden.

note:

use medium strength screwlock for screw threads.

red surfaces have to be greased.

ÜBERSICHTSZEICHNUNG


Assembly Drawing

GHOST

BOM-ID	Item no.	Description	Specification	Torque	QTY
9*	FROT0237	PATH ASKET <u>ADVANCED</u> Cable Guides Left			1
9*	FROT0257	PATH ASKET <u>PRO</u> Cable guides left			1
10	FROT0281	PATH ASKET Cable Guide Right			1
11	SM1524	Counter Sunk Screw	T10 - M3x10mm	0,8 Nm	2
12	SC0017	Seat Clamp		5 Nm	2
13	SM0919	Lens Head Screw	T25 - M5x11mm	3 Nm	19
14	SM1786	Screws Drive Unit	T30 - M6x25mm	14 Nm	6
15	SM1778	Counter Sunk Screws For Cover	HEX3 - M4x10mm	1 Nm	2
16	FROT0224	Cover Drive Unit			1
17	SM1777	Hexagon Screws For Cover	HEX3 - M4x10mm	1 Nm	2
18	EL0326	Spacer Left			2
19	EL0325	Spacer Right			2
20	SM1787	Washer	D6,4mm		6
21	WAX0019	Rear Thru Axle	148x12mm P1,0x15mm	10 Nm	1
22*	WAX0026	Front Thru Axle	100x12mm P1,0	10 Nm	1

ÜBERSICHTSZEICHNUNG

Assembly Drawing

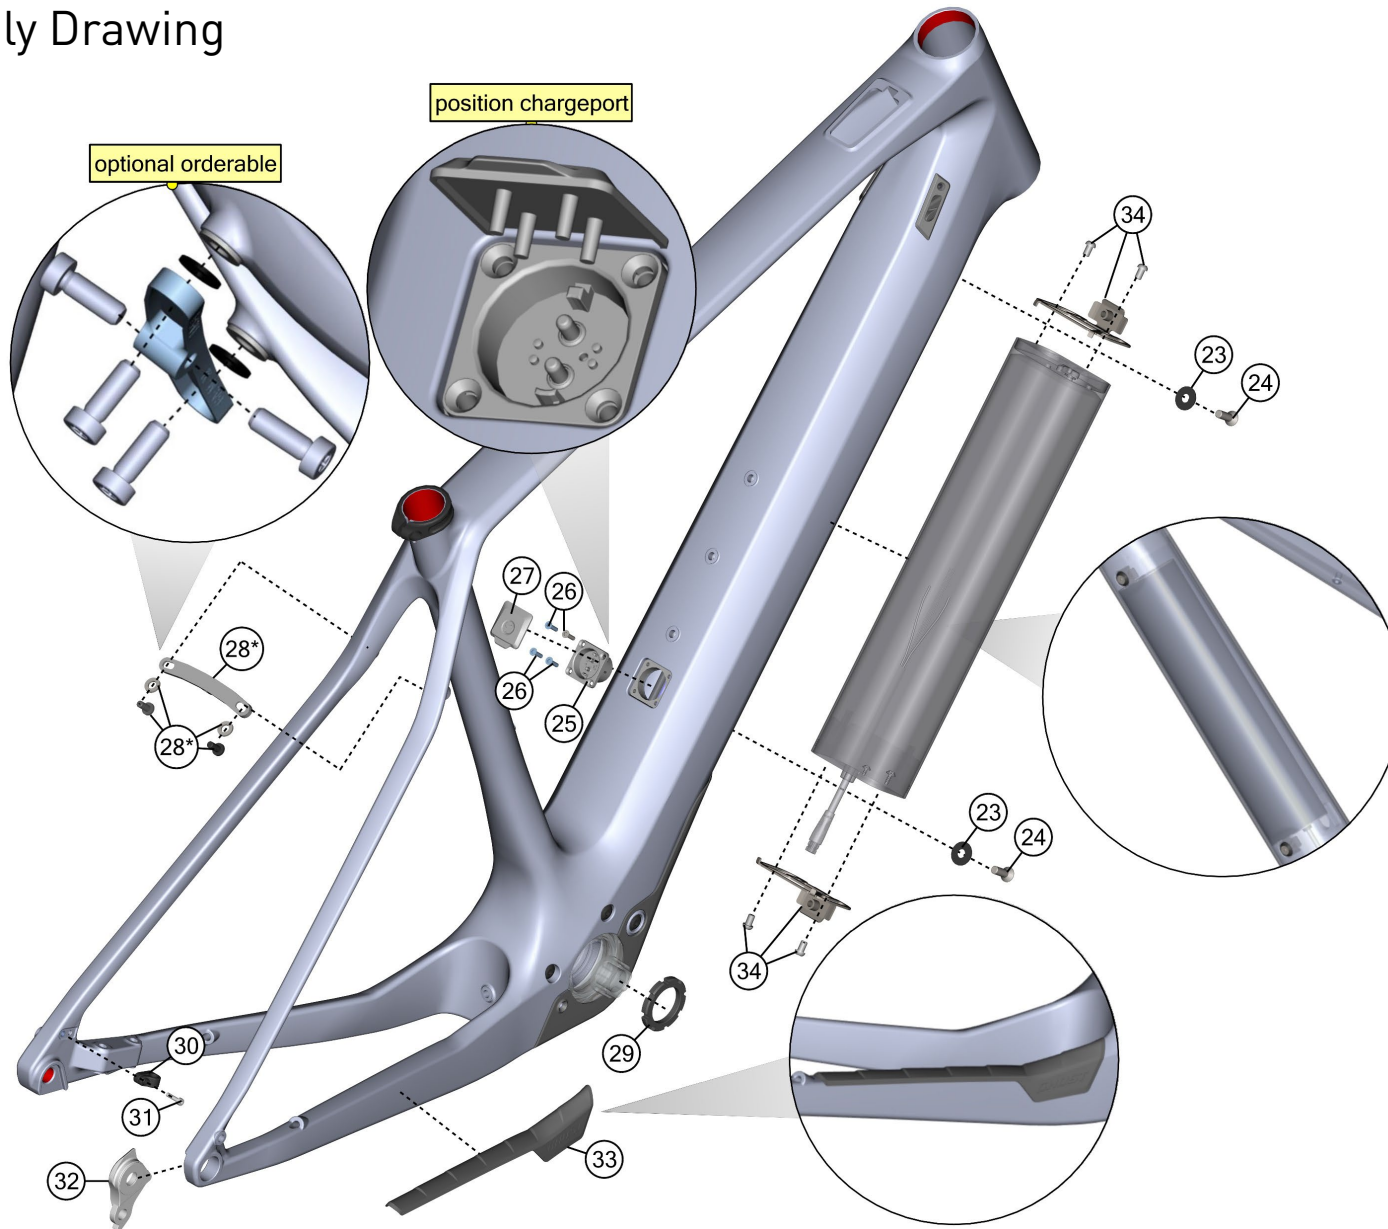

GHOST

Hinweis:

Bei Schrauben muss mittelfeste

Gewindesicherung verwendet werden.

Rote Flächen müssen gefettet werden.

note:

use medium strength screwlock for screw threads.

red surfaces have to be greased.

*optional

ÜBERSICHTSZEICHNUNG

Assembly Drawing

GHOST

BOM-ID	Item no.	Description	Specification	Torque	QTY
23	SM1805	Washer			2
24	SM1771	Counter Sunk Screw	Hex 4 - M6x16mm	9 Nm	2
25	EL0318	Charge Port			1
26	SM1788	Screws For Charge Port	T8 – M2,5x10mm	0,5 Nm	4
27	EL0319	Cap Charge Port			1
28*	FROT0029	Fender Adapter Set With Screws & Washers			1
29	EL0308	Lockring		20 Nm	3
30	EL0327	Holder Speedsensor			1
31	SM1776	Cylindrical Head Screw	HEX 2,5 – M3x12mm	0,5 Nm	1
32	FRHG0061	Hanger Sram Udh		20 Nm	1
33	FRPR0086	Cs Protector			1
34	EL0322	Battery Fix Mount Incl Screws			2

*optional

ÜBERSICHTSZEICHNUNG

Assembly Drawing



Datenblatt

Fact Sheet

HEADSET	TOP: ZS44	BOTTOM: ZS56
SEATPOST DIAMETER	31.6 MM	
CLAMP INNER DIAMETER	34.9 MM	
BOTTOM BRACKET	FAZUA	
KICKSTAND	-----	
ISCG STANDARD	-----	
CARRIER MOUNT	YES	
FENDER COMPATIBLE	YES (adapter)	
DROPPER SEATPOST READY	YES	
EQUIPMENT MOUNTING POINTS		4
WATERBOTTLE MOUNTS	Framesize: S - XL	2

MAXIMUM PERMISSIBLE TOTAL WEIGHT	120 KG
MAXIMUM TIRE SIZE	29 x 2.0
WHEEL SIZE	29"
THRU AXLE LENGTH	169 MM
OVER-LOCKNUT DIMENSION (O.L.D)	148 MM
DRIVE UNIT	FAZUA
AKKU TYPE	430 WH
RANGE EXTENDER READY	YES
REMOTE	ROAD CONTROL