

**ÜBERSICHTSZEICHNUNG**  
**ASSEMBLY DRAWING**

***GHOST***



**LECTOR SF**

Datum: 11-09-2019

Version: 1.0



LECTOR SF  
date: 11-09-2019  
version: 1.0

page 1 / 3


# ÜBERSICHTSZEICHNUNG

## ASSEMBLY DRAWING

# GHOST

**Hinweis:** Für Modelle ohne integrierte Sattelstütze.

**Note:** For models without integrated seat post.

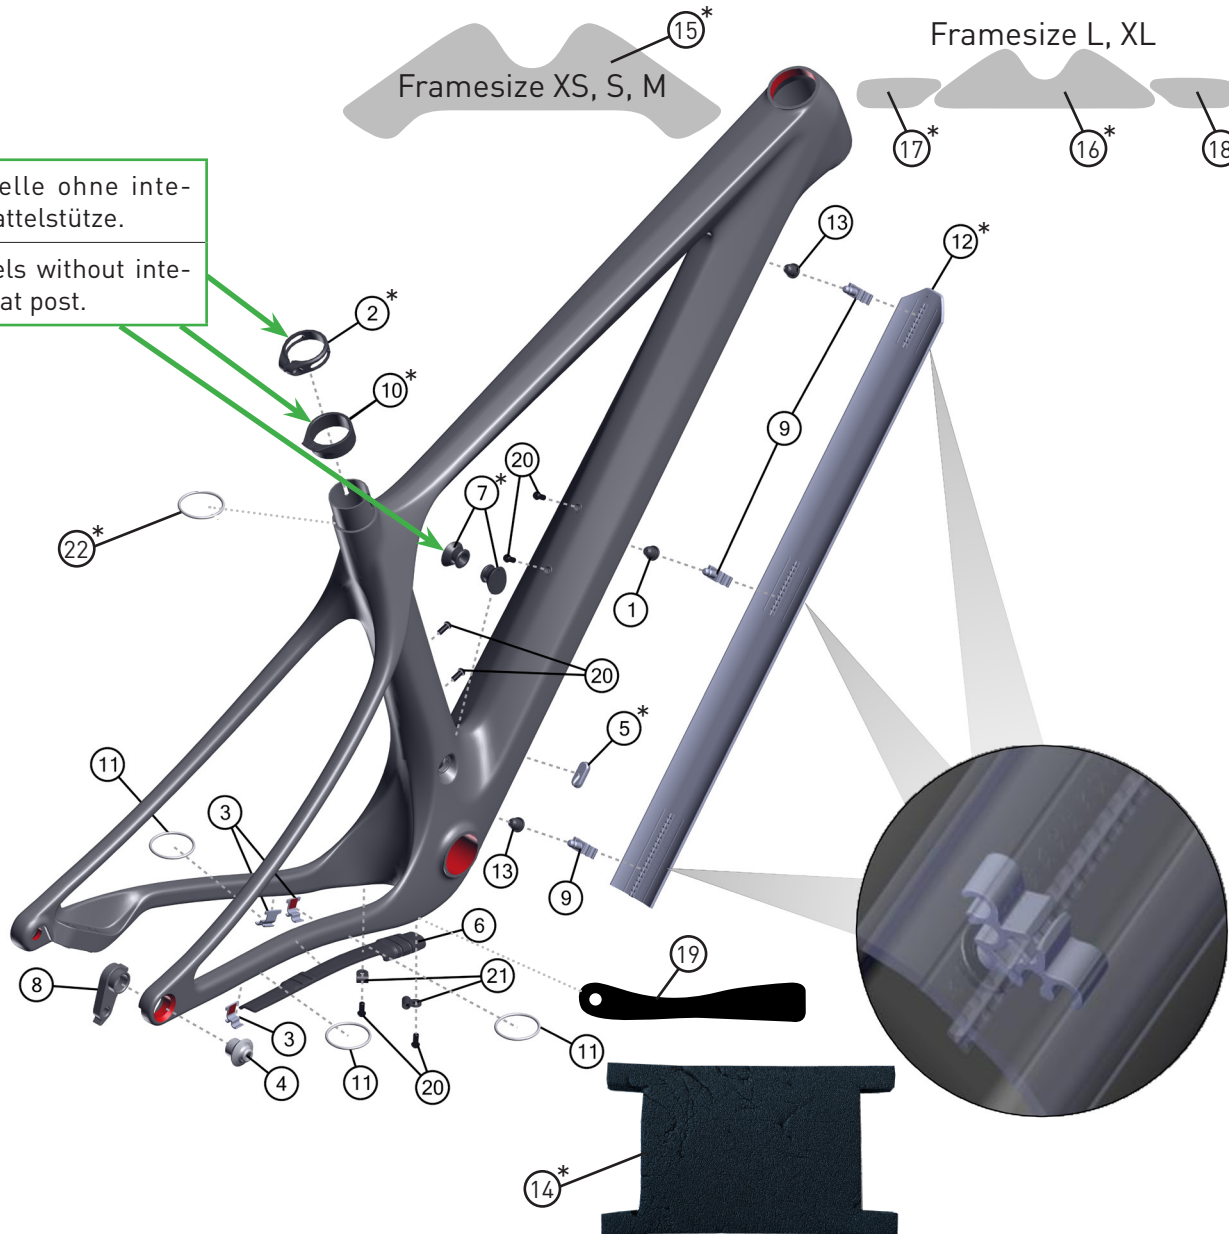

**Hinweis:** Bei den Schrauben muss mittelfeste Gewindegewissicherung verwendet werden.  
Rote Flächen müssen gefettet werden.

**Note:** use medium strength screw lock for screw threads.  
red surfaces has to be greased.

FACT SHEET:	
SHOCK LENGTH:	----
SHOCK HARDWARE:	
TOP:	----
BOTTOM:	----
HEADSET:	
TOP:	ZS 44
BOTTOM:	ZS 56
SEATPOST DIAMETER:	34.9 MM
CLAMP INNER DIAMETER:	38.0 MM
BOTTOM BRACKET:	Pressfit
KICKSTAND:	----
ISCG STANDARD:	----



LECTOR SF  
date: 11-09-2019  
version: 1.0

# ÜBERSICHTSZEICHNUNG

## ASSEMBLY DRAWING

# GHOST

BOM-ID	Description	Specification	Torque	Item no.	QTY
1	Snaploc-Coupling 80 Shore			FROT0044	1
2*	GW Seatclamp Style A 38,0mm black			SC0003	1
3	Hesling Chain Stay Cable Holder			FROT0068	3
4	Jovial Nirvana/Lector/Riot Hanger mount T6, black		20 Nm	FRNT0008	1
5*	Winnig Cable Guide Plug 4,5 mm for <b>Eightpins Cable</b>			FROT0074	1
6	C/S protector CG, Lector			FRPR0036	1
7*	PP Rubber Plug SET CG, Lector			FRPR0038	1
8	Jovial Nirvana/Lector/Riot Hanger, black			FRHG0025	1
9	Hesling Cable Clip, Lector			FROT0075	3
10*	Rubber ring for Seattube CG, Lector			FRPR0037	1
11	O-Ring Ø 40 x 2,5 mm			FROT0070	3
12*	DT Cover, Lector <b>framesize XS - S</b>			FRPR0033	1
12*	DT Cover, Lector <b>framesize M</b>			FRPR0034	1
12*	DT Cover, Lector <b>framesize L - XL</b>			FRPR0035	1
13	Snaploc-Coupling 93 Shore			FROT0095	2
14*	BB Intube Staub Schutz for <b>Eightpins</b>			FROT0071	1
15*	Protection Sticker for HT, Lector <b>framesize XS - S - M</b>			FRPR0047	1
16*	Protection Sticker for HT, Lector <b>framesize L - XL</b>			FRPR0048	1
17*	Protection Sticker for DT ( <b>left side</b> ), Lector <b>framesize L - XL</b>			FRPR0049	1
18*	Protection Sticker for DT ( <b>right side</b> ), Lector <b>framesize L - XL</b>			FRPR0050	1
19	C/S protector CG down side, Lector			FRPR0051	1
20	Lens head screw	TX25 - M5 x 11 mm		SM0919	6
21	Cable guide			SM0002	2
22	O-Ring Ø 38 x 2,5 mm for <b>Eightpins</b>			FROT0109	1